


Floating and Proportional Control

The VA-7150 series synchronous motor driven actuator provides floating or proportional control of valves with up to 19 mm stroke in heating, ventilation and air conditioning applications.

This compact, non-spring return actuator has 500 N nominal thrust and responds to a variety of input signals. The VA-7150 series can be easily installed on site or ordered pre-fitted to VG7000, VGS800 and VG9000 flanged valve series in accordance with the specified maximum close-off pressure ratings.

Features

- 500 N force output in a compact unit
- Magnetic clutch
- Unique Yoke Design
- Coupler for simple actuator attachment to flanged valves
- Positioner with adjustable starting point and span, reverse and direct action modes
- "Signal fail" safe position

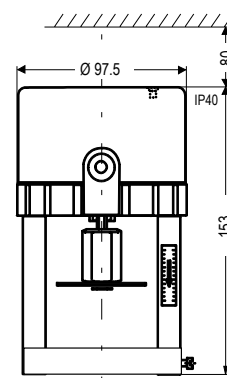

Dimensions in mm

Ordering Codes	Supply Voltage (50/60 Hz)	Action Control	Protection Class	Coupler Type
VA-7150-1001	24 VAC	Floating	IP 40	Threaded
VA-7150-1003	230 VAC			
VA-7150-8201	24 VAC			Slotted
VA-7150-8203	230 VAC			
VA-7152-1001	24 VAC	Proportional 0...10 V		Threaded
VA-7152-1003	230 VAC			
VA-7152-8201	24 VAC			Slotted
VA-7152-8203	230 VAC			